


## Commercial alu T-moulding

### Description:

- Specially developed for commercial use and high footfall areas
- Resistant to loads of heavy trolleys
- Flexible in height
- Durable surface: UV protected colours and scratch resistant surface
- Slip resistant



T-moulding: From laminate to laminate

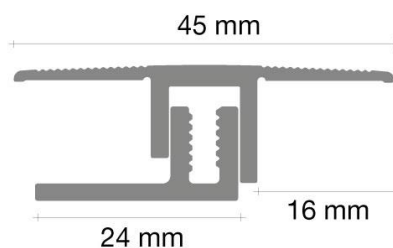

### Characteristics:

Properties	Value
Material	Anodised Aluminium
Surface	Scratch and slip resistant
Colours	Silver. UV protected
Bottom part	Alumina. Screws for the top part included

### Demographics:

Product	Length mm	Width mm	Height mm	Quantity/pack pcs
T-moulding PGEXPCSILV / 49176	2700	45	3*	5

### Installation instruction:

Install the bottom part to the subfloor. Place the top part on the bottom part and fix with screws (included).

In case of under floor heating consider fix the bottom part by gluing.

Suitable for floors between 7-12 mm